

# GT-5900-1600

GT-5900-1600

470-860MHz

DTMB CMMB DVB- T/T2

ISDB-T ATSC-T




- 470 ~ 860MHz
- , :DTMB, CMMB DVB- T/T2, ATSC-T ISDB-T
- , ,
- \ \ 1+1



- LDMOS
- 



- ALC AGC ( )
- ;
- ;
- 
- 
- 
- ;
- 
- TFT
- 
- Web GPRS
- :

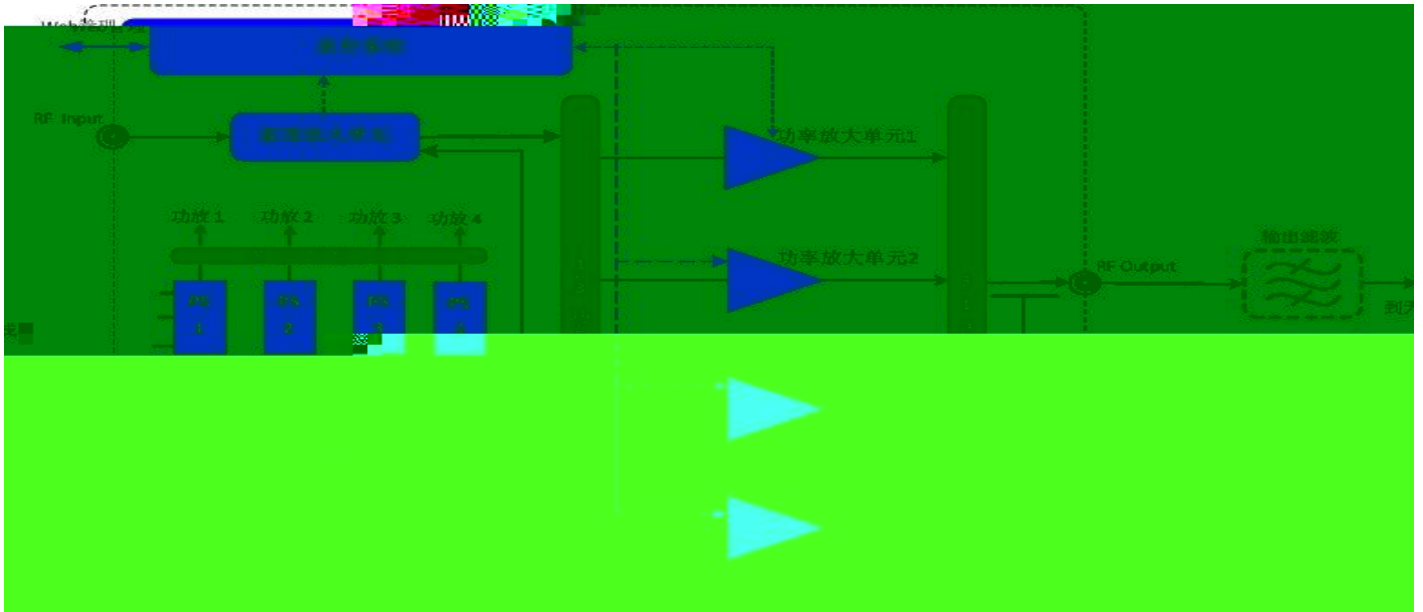

:

	( * * )	650*1700*1000mm(33U 19 )
		250KG
		0~45°C
		-25~85°C
		10%~90%
		<b>AC 380V 10% 50Hz</b>
		AC 220V 10% 50Hz
		N-50K

		1-7/8 3-1/8
		1 x RJ-45, 10/100Base-T
	RF	SMA-50K
	TS	BNC-75K( )
	10MHz	BNC-50K( )
	1PPS	BNC-50K( )
	AGC	±8 dB
		90dBuv
		DTMB CMMB DVB-T/T2 ISDB-T ATSC-T
<b>(DTMB)</b>		
		MFN SFN
		1Hz
	SFN	±1Hz
	MFN	±100Hz,
3		1 10 <sup>-7</sup>
		1 10 <sup>-10</sup>
(RMS)		62dBm
		±0.5 dB
	10Hz	-60dBc
	100Hz	-75dBc
	1kHz	-85dBc
	10kHz	-95dBc
	100kHz	-110dBc
	1MHz	-115dBc
	-3.9MHz	-32.8dBc
	+3.9MHz	-32.8dBc
	-4.94MHz	-69.9dBc
	+4.25MHz	-64.9dBc
	-5.75MHz	-74.2dBc
	+5.25MHz	
	-9.75MHz	
	+6.25MHz	-76.9dBc
	-10.75MHz	
	+10.25MHz	
	-12MHz	-100dBc
	+12MHz	
(MER)		33 dB
	@fc±4.2MHz	-36 dB
	@fc±3.591MHz	±0.5 dB
		-45dBc